


Fire & Moisture Resistant Gypsumboard (FM)



In addition to the features of Knauf Standard Gypsumboard (RG), **Knauf Fire & Moisture Resistant Gypsumboard (FM)** is reinforced with fiberglass, to fulfill its fire rating values, and is impregnated against the absorption of moisture by hydrophobizing agents. It is used where both fire resistance and moisture resistance are required. Knauf FM board is visually recognizable by its green boardliner and red marking on the back.

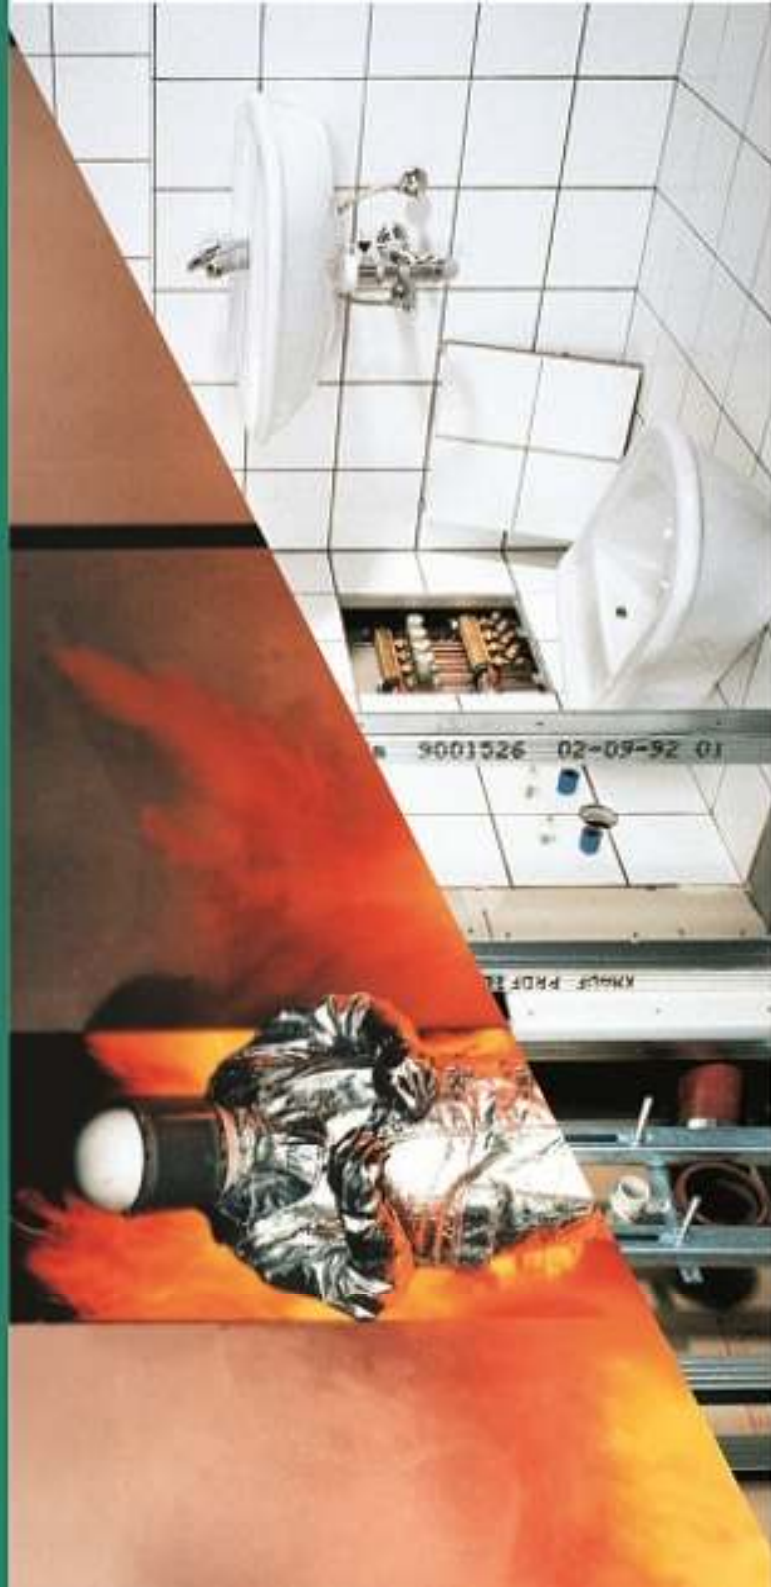

Tapered edges give more space for bedding the joint filler and tape. As a result, a seamless fine finish is achieved at joints.

Thickness (mm)	Width (mm)	Length (mm)	Weight (kg/m ²)	Boards/Pallet	Edge Profile
12.5	1200	2400/2500 2800/3000	10.8	60	AK
15	1200	2400/3000	13.7	60 50	AK
18	1200	2400/3000	16.6	50 40	AK

Fire resistant



Moisture resistant




Thermal insulation




Sound insulation




Lightweight construction



Tiling



Economical



Easy to use



Speedy installation



KNAUF